
LINO

ECHO LAYERS

WALL

LINO a premium dual-layer acoustic panels with a refined striped design. Engineered to absorb and diffuse sound, LINO adds depth, warmth and calm to any space.

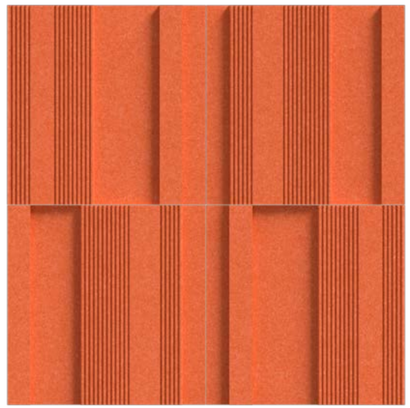

MOQ

6 Units in a single color

THICKNESS

24mm (0.94")

SIZES

600x600mm (23.62x23.62")

MODELS

Model A

Model B



HOW TO PLACE AN ORDER

LINO offers versatile possibilities for shaping your space. As you plan your layout, take a moment to reflect on a few guiding questions to help refine your design.

Please note that the tiles cannot be cut, so your layout must be planned using full tiles only. Accurate planning will ensure a seamless and visually pleasing result.

Model A and Model B can be combined together.

Please note the minimum order quantities:
Set of 6 units in a single color




Choose your preferred model: Model A Model B or Both

PAGE 3




Choose your desired color from our color palette – printing option available

PAGE 5-6



Ensure the wall dimensions meet the required specifications

PAGE 7




Select the internal layout according to the available options


PAGE 4

GEOMETRIC


MODEL A

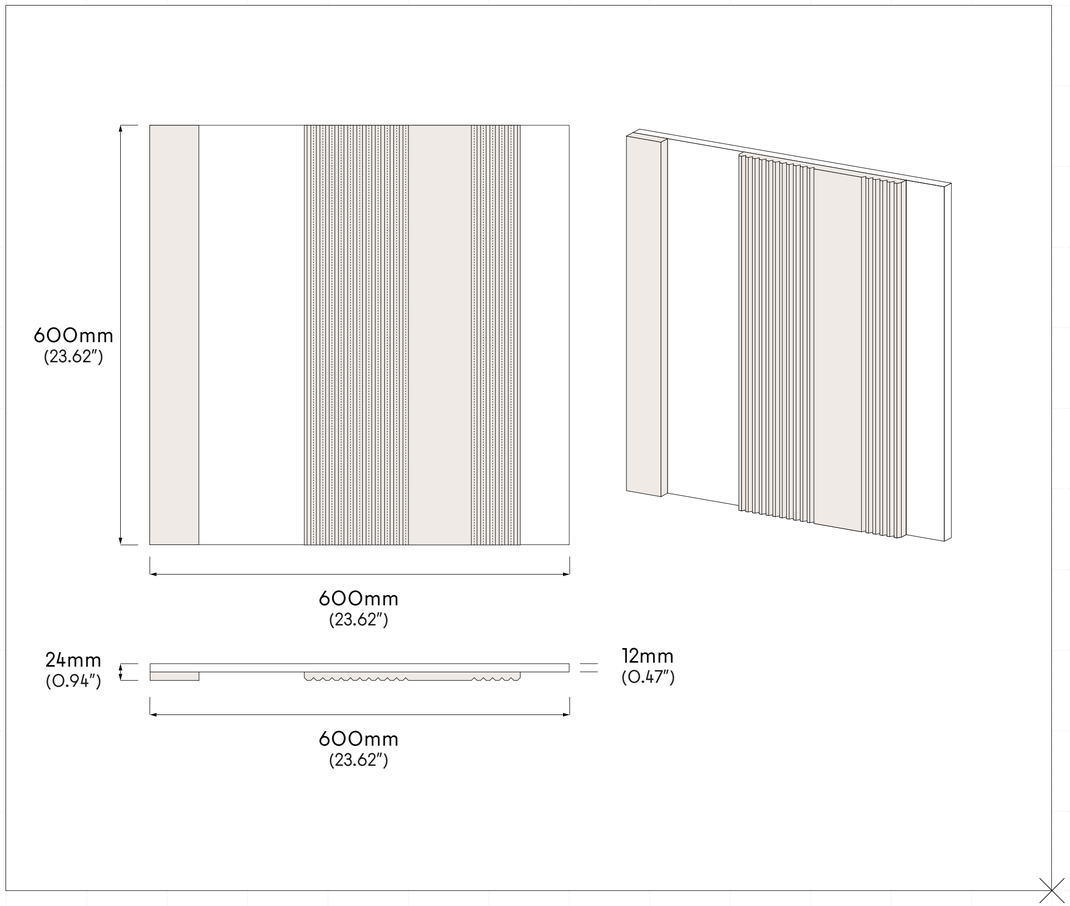

MODEL B

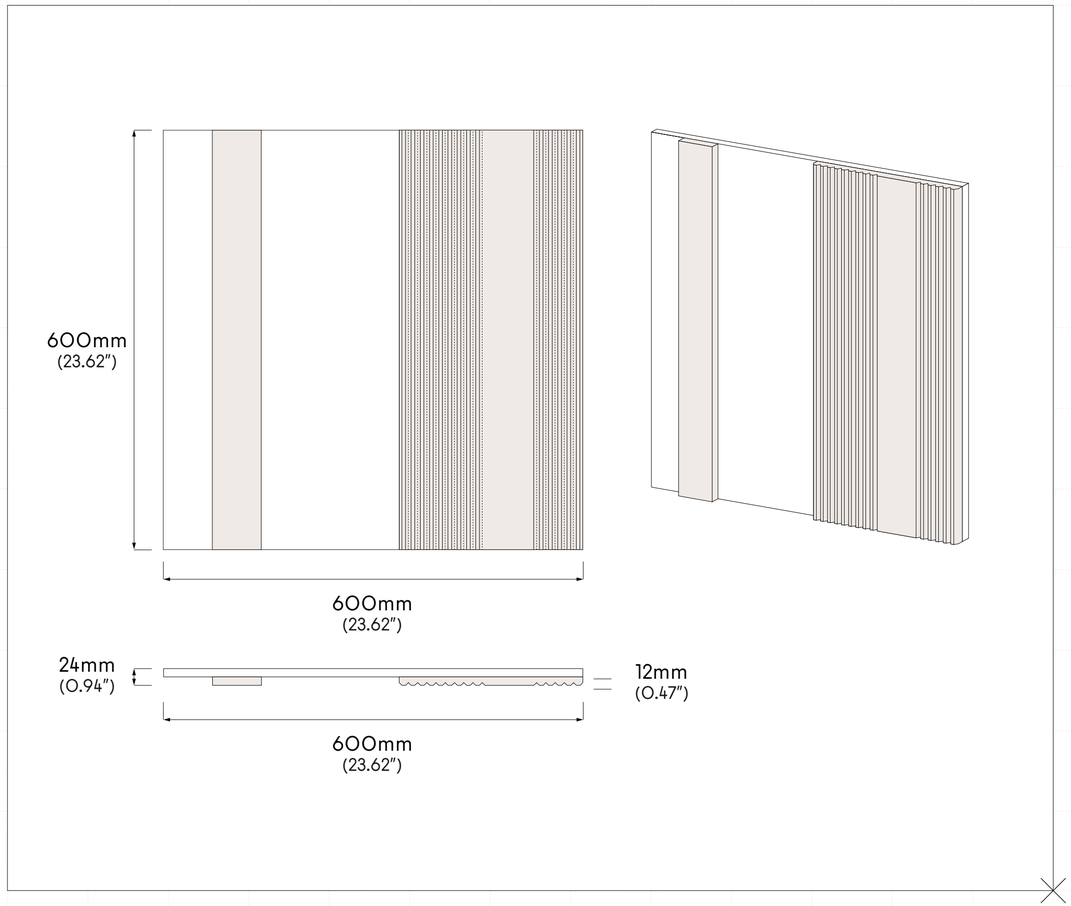

SUGGESTED PATTERNS

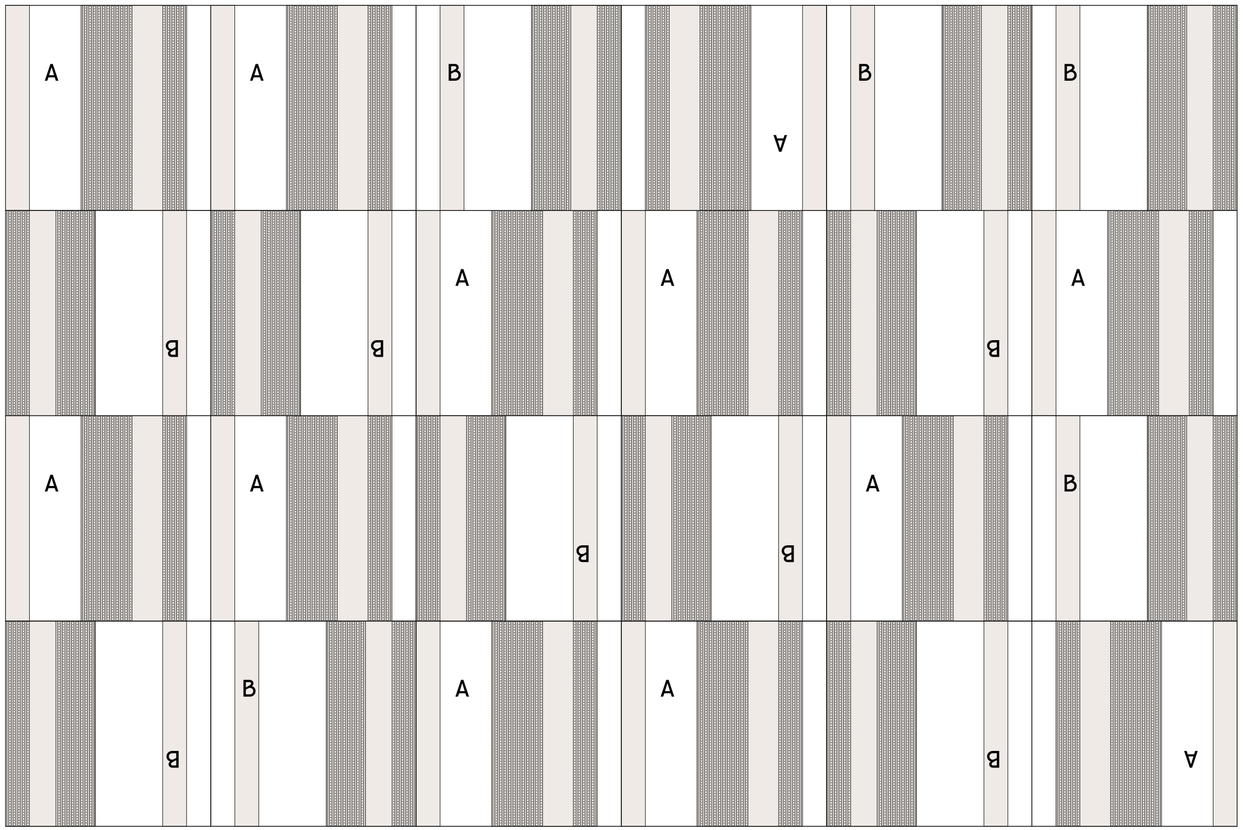

COLORS

echoshape panels are crafted from 12mm PET felt, serving as the core material in our acoustic solutions. Available in a curated range of colors, these panels are designed to enhance both the visual and acoustic qualities of any space.

Choose from subtle neutrals for a seamless look, or introduce bold tones to create striking contrasts. Due to the nature of the PET felt manufacturing process, a soft heathered texture may appear, blending multiple shades within each panel. As a result, slight color variations between units are natural and reflect the sustainable, recycled origin of the material.

Please note: colors may appear differently on screens or in print. For accurate color matching, we recommend requesting a physical sample.




PRINTED PATTERNS

echoshape panels are crafted from 12mm PET felt, serving as the core material in our acoustic solutions. Available in a curated range of colors, these panels are designed to enhance both the visual and acoustic qualities of any space.

Choose from subtle neutrals for a seamless look, or introduce bold tones to create striking contrasts. Due to the nature of the PET felt manufacturing process, a soft heathered texture may appear, blending multiple shades within each panel. As a result, slight color variations between units are natural and reflect the sustainable, recycled origin of the material.

Please note: colors may appear differently on screens or in print. For accurate color matching, we recommend requesting a physical sample.



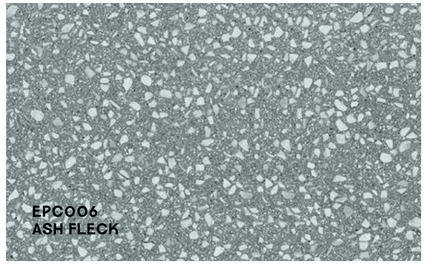


























SPECIFICATIONS


MANUFACTURED FROM	Panels
COMPOSITION	100% Polyester (PET)
SUSTAINABILITY	70% Recycled plastic bottles
APPLICATION	Wall tiles
FIRE RATING	EN13501-1 | B S-1 d0 ASTM E-84 – Class A
SIZE	600x600mm (23.62x23.62")
THICKNESS	24mm (0.94") total (12+12mm), TOLERANCE ±7%
INSTALLATION	Gluing
ACOUSTIC RESULTS	Measurement results Echoshape mounted at an airgap of 0 mm α_w 0.25 / NRC 0.30 Measurement results Echoshape mounted at an airgap of 50 mm α_w 0.55 / NRC 0.65 Measurement results Echoshape mounted at an airgap of 200 mm α_w 0.85 / NRC 0.80
ACOUSTIC CERTIFICATE	ISO 354:2003 EN ISO 22654: 1997 ASTM C423-17
VOC	According to EN ISO 16000-9 Standard: A+
CARE	Indoor use only. Clean with a damp cloth or vacuum. For spills, blot, immediately use water with a soft cloth, and if needed, mild detergent. Dry while still wet. For stubborn stains, try water first, then mild detergent.

INSTALLATION GUIDE


THESE ARE YOUR PARTS

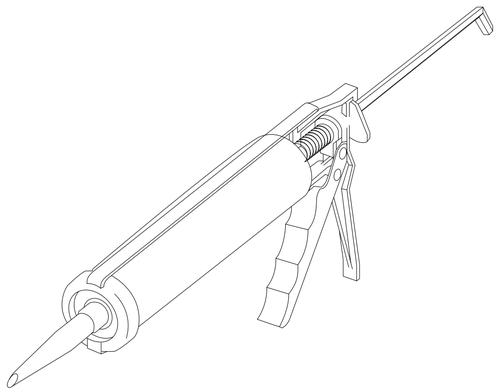

Sillicone Adhesive

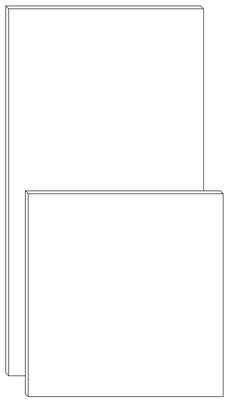


Tiles

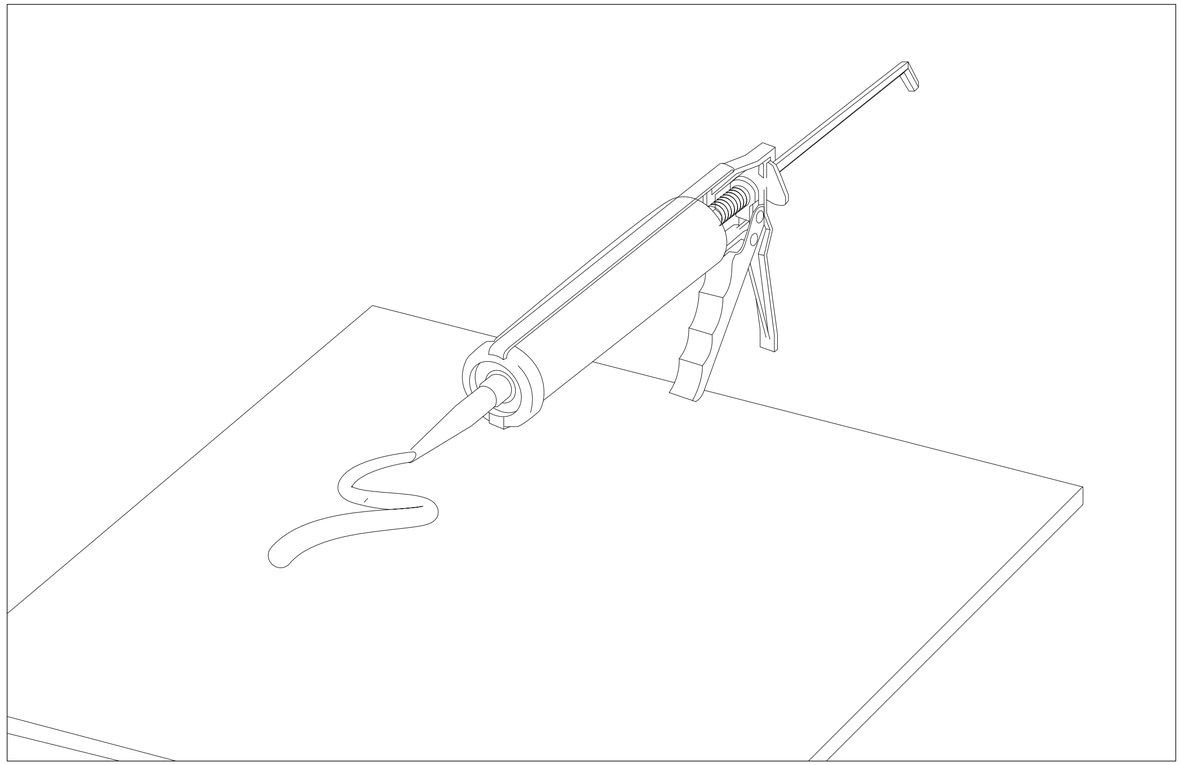

1

Apply strips of construction adhesive to the back of the Lino tile.

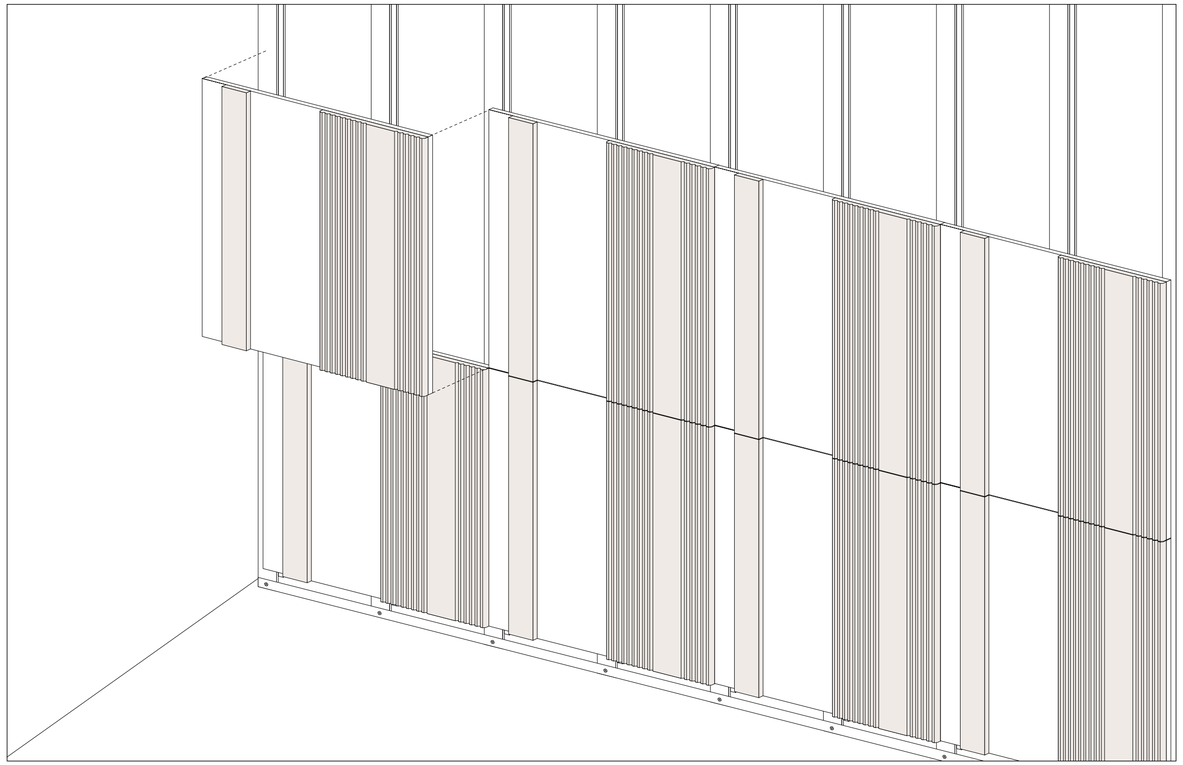

2

Glue the tiles while one stud is at the center of the tile and the two others on each edge. Repeat the process for the entire wall.